




DN	NPS	A	B	ØC	D	E=A+189	F	ISO-5211	PN10		PN16		ANSI150	
								FLANGE TYPE	ØK	Nº	ØK	Nº	ØK	Nº
32	1 1/4"	205	139	83	33	394	31.75	F07	100	4	100	4	89	4
40	1 1/2"	205	139	83	33	394	38.1	F07	110	4	110	4	98.4	4
50	2"	227	154	104	43	416	50.8	F07	125	4	125	4	120.7	4
65	2 1/2"	246	160	121	46	435	63.5	F07	145	4	145	4	139.7	4
80	3"	260	170	132	46	449	76.2	F07	160	4	160	4	152.4	4
100	4"	295	187	154	52	484	101.6	F07	180	4	180	4	190.5	4
125	5"	324	205	189	56	513	127	F07	210	4	210	4	215.9	4
150	6"	349	217	218	56	538	152.4	F07	240	4	240	4	241.3	4

Bill Of Material			
Item	Name	Qty.	Material
1	ERQT 15XX Actuator	1	ALUMINIUM ALLOY
2	Claw Coupling	1	ZINC PLATED, WELDABLE MILD STEEL
3	Knurled Link Bolt	1	ZINC PLATED, WELDABLE MILD STEEL
4	M8X40 Hex Head Bolt & Ny-loc Nut	4	SS 304
5	ISO Bracket Plate	1	SS 304
6	Damper Butterfly Valve Body	1	NODULAR IRON EPOXY COATED / SS 316
7	Damper Butterfly Valve Disc	1	NODULAR IRON EPOXY COATED / SS 316
8	M20X1.5 Cable Gland	1	P.V.C
9	M16X1.5 Cable Gland	2	P.V.C

NR	NEW RELEASE			DATE	SIGN.
MOD.NO.	REF.	MODIFICATION			
MATERIAL : As Per Bill Of Material		CLASSIFICATION OF CHARACTERISTICS		DRN.	
		CRITICAL.....● KEY INSTRUCTION.....▲		CHD.	
		MAJOR.....● MINOR.....NONE		APPD.	
TREATMENT :		DO NOT SCALE THE DWG.		ALL DIMENSIONS ARE IN MM	
		IF IN DOUBT ASK		QTY. -	WT.(kg)-
				SCALE :	
* THIS DRAWING IS THE PROPERTY OF M/s. PEREGRINE TECHNOLOGIES PVT. LTD. & MUST BE RETURNED ON REQUEST. THIS IS FURNISHED AS CONFIDENTIAL INFORMATION & MUST NOT BE USED/COPIED OR LENT ANY PURPOSE WITHOUT OUR AUTHORITY IN WRITING.		TITLE: GA OF BUTTERFLY DAMPER MOUNTED & OPERATED BY ELECTRIC ACTUATOR ERQT 15XX.		DRG.No. 144050E2230182	
MODEL: ERQT 15XX				SIZE	A4 MOD.NO. NR

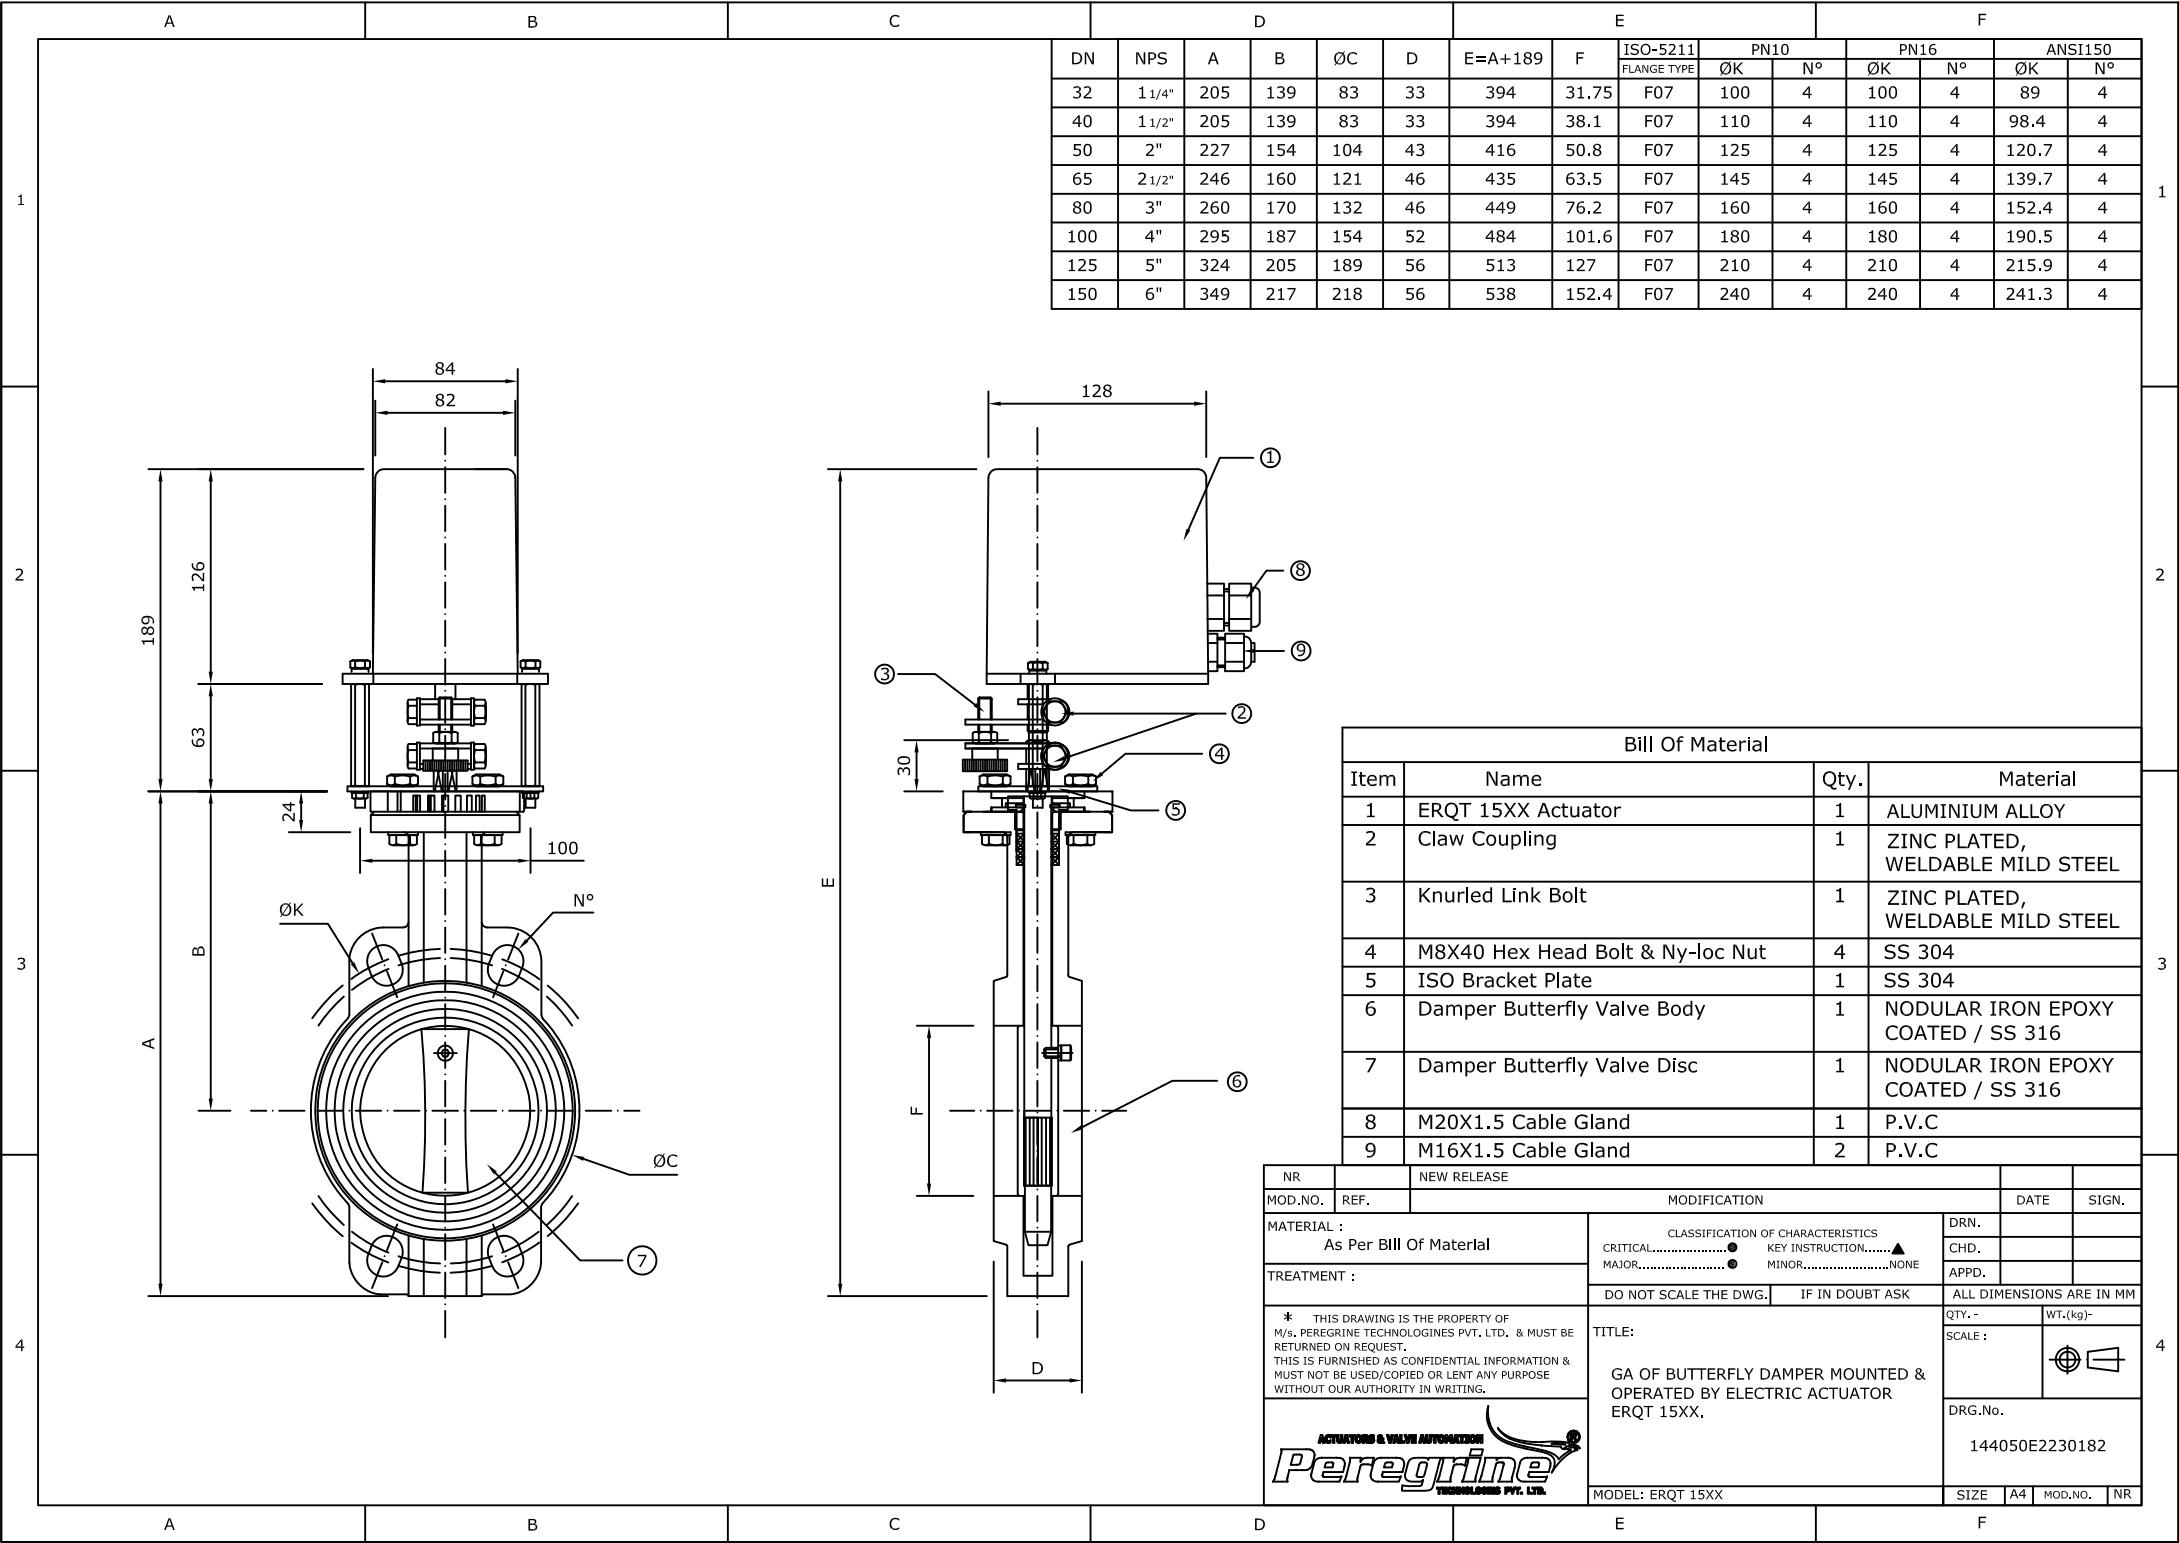